

LED

746 PRO LT

Industrial dust and waterproof luminaires

With 1 and 2 LED tubes.

YOUR MAIN BENEFITS:

This product family has been **designed for LED tubes**. Thanks to its special construction this model offers you an additional price advantage: It can be used without any gear tray.

Full range available in IP65 and IP66

CE

746 PRO LT



IP65



FIELD OF APPLICATION:

Thanks to the construction principals of gasket, closing system and diffuser our fixtures ensure a high grade of protection (IP65, IP66) against dust, contamination and water permeation. In accordance with their IP grade they can be widely used to illuminate spaces with dusty and humid environment.

When using outdoors, the fittings should be protected against direct sunlight and adverse weather conditions. Under 0°C the application of venting cable gland is necessary, as well as silicone gasket is strongly recommended.

TECHNICAL DESCRIPTION AND BENEFITS:

■ **Housing:** It is made of flame retardant glass fibre reinforced polyester (on request suitable for 850°C glow wire test too), in light grey (RAL7035) colour. This material has very good temperature resistance, mechanical stability, furthermore it is a good electrical insulator, it resists the impacts of several chemicals and the impacts of weather conditions. Its stability of size and shape at changing temperatures is excellent.

■ The **diffuser** is available in the following versions:

Injection moulded acrylic (PMMA):

transparent, with longitudinal prisms, designed with respect to their optical characteristics.

Main advantages of PMMA: Very good transparency (better than the transparency of glass), unique nonaging properties, chemical and **UV-resistance**.

Injection moulded polycarbonate (PC):

transparent, with longitudinal internal prisms, designed with respect to their optical characteristics.

Main advantages of PC: High mechanical strength and high heat and shock resistance.

■ **The gasket** between the diffuser and housing is made of non-aging PU (polyurethane) foam. An option with enhanced gasket resistance is available.

■ **Fixing the diffuser to the body:** with stainless steel clips

■ **Gear tray (reflector): No gear tray needed.** The electrical components are mounted directly into the housing. As option white powder coated steel sheet gear tray is available.

■ **Way of installing:** direct (with screws) or with stainless steel mounting brackets (easy-to-install) onto the wall or ceiling or suspended.

■ **Electrical components:** The adequate power supply is ensured through electronic driver, that is built in into the LED tube.

Option:

IP66




Main technical options

Optimised economical packaging with plastic net. On request traditional carton box or retail-box packaging available.



746 PRO LT

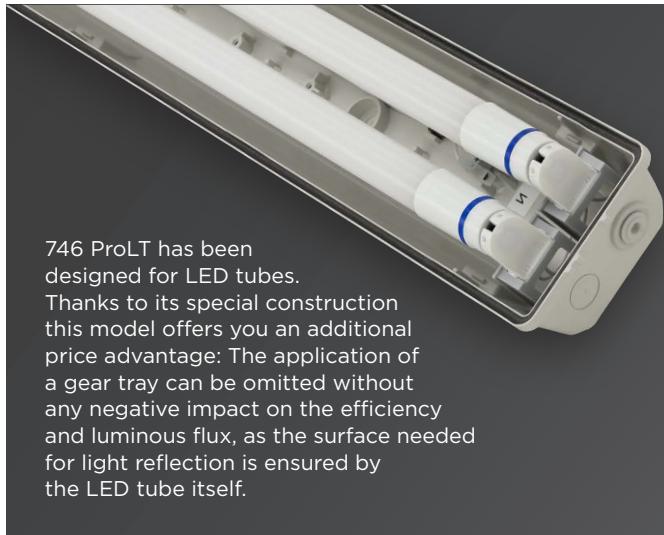

746 ProLT has been designed for LED tubes. Thanks to its special construction this model offers you an additional price advantage: The application of a gear tray can be omitted without any negative impact on the efficiency and luminous flux, as the surface needed for light reflection is ensured by the LED tube itself.

The prismatic diffusers are designed with respect to their optical characteristics and are UV resistant.




Fixing of the diffuser to the body: with highly resistant stainless steel clips.

Technical data (extract)


Type	Lampholder	Power (W)	Luminous flux (lm)	Dimensions A (mm)	B (mm)	Weight (kg)
746 Pro LT equipped with Retrofit LED tube (Philips Core Pro LED tube)						
746 Pro LT 1x600mm	T8/G13	1x8	680*	699	435	1,19
746 Pro LT 1x1200mm	T8/G13	1x14,5	1360*	1277	800	2,47
746 Pro LT 1x1500mm	T8/G13	1x20	1870*	1577	1100	2,57
746 Pro LT 2x600mm	T8/G13	2x8	1360*	699	435	2,31
746 Pro LT 2x1200mm	T8/G13	2x14,5	2720*	1277	800	3,35
746 Pro LT 2x1500mm	T8/G13	2x20	3740*	1577	1100	3,37

Schematic drawing with main dimensions:

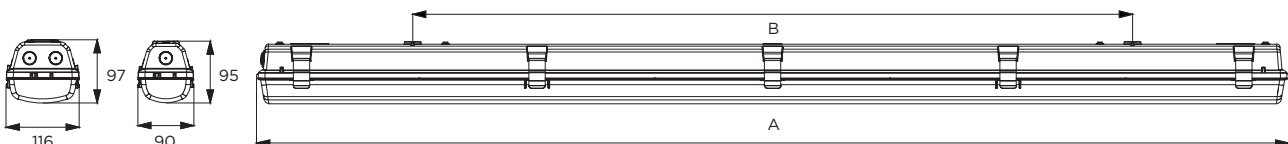

Photometric curves:

746 PRO LT 1x1200mm 1x14,5W (LED tube)

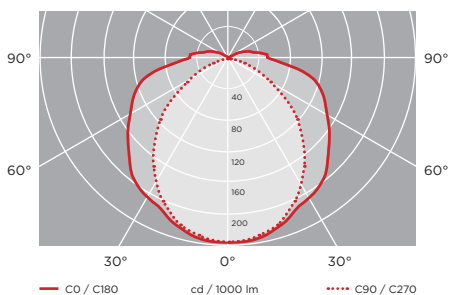

746 PRO LT 2x1500mm 2x20W (LED tube)

